

**Series 4, built-under cooker hood, 60 cm, Stainless steel
DHU665CGB**



The built-under cooker hood: save space by mounting the hood beneath your upper cabinet or on the wall.

- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes

Typology:	Built-in/Built-under
Length electrical supply cord:	130.0 cm
Net weight:	9.1 kg
Type of control:	mechanical
Number of speed settings:	3
Max. air recirculation:	260 m ³ /h
Number of lights:	2
Noise level:	68 dB(A) re 1 pW
Diameter of air outlet:	120 mm
Grease filter material:	Washable aluminium
Odour filter:	Yes
Operating Mode:	Convertible
Type of lamps used:	Halogen
Total power of the lamps:	56 W
Grease filter type:	Kassette
Connection rating:	306 W
Voltage:	220-240 V
Frequency:	50 Hz
Plug type:	GB plug
Installation typology:	Built-under
Material body:	Stainless steel
Plug type:	GB plug
Dimensions of the product, with chimney (if exists) (in):	x x
Dimensions of the packed product:	21.65 x 8.26 x 25.19
Net weight:	20.000 lbs
Gross weight:	22.000 lbs
Motor location:	Integrated motor in hood body
No-return airflow flap:	No
Length electrical supply cord:	130.0 cm
Dimensions of the product, with chimney (if exists):	150 x 600.0 x 482.0 mm
Dimensions of the packed product (HxWxD):	550 x 210 x 640 mm
Net weight:	9.1 kg
Gross weight:	10.1 kg



4 242002 731476

Series 4, built-under cooker hood, 60 cm, Stainless steel DHU665CGB

The built-under cooker hood: save space by mounting the hood beneath your upper cabinet or on the wall.

Variant:**Design:**

- 600 mm width

Comfort:

- Suitable for ducted or re-circulated extraction
- Push button controls for 3 speeds
- Twin motor
- Adjustable glass visor
- 2 x halogen - energy saving lamps
- Metal grease filter, dishwasher safe

Technical information:

- Ducted extraction rate according to DIN/EN 61591: max. 350 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 68 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Power rating: 306 W


Measures:

- Dimensions exhaust air (HxWxD): 150 - 150 x 600 x 482 mm
- 120 mm diameter pipe
- Light Intensity: 110 lux
- Colour Temperature: 2700 K


Environment and Safety:

* In accordance with the EU-Regulation No 65/2014

**Series 4, built-under cooker hood, 60
cm, Stainless steel
DHU665CGB**

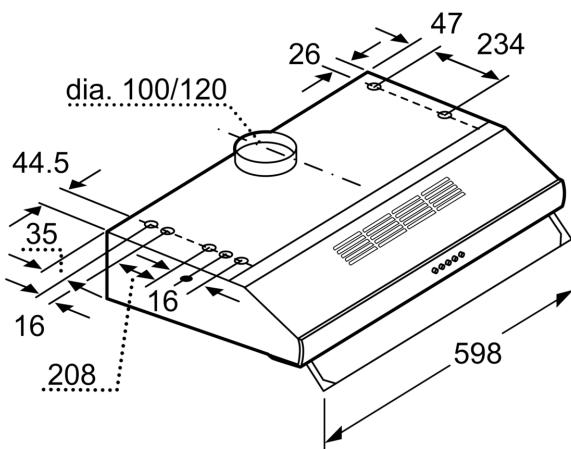

measurements in mm

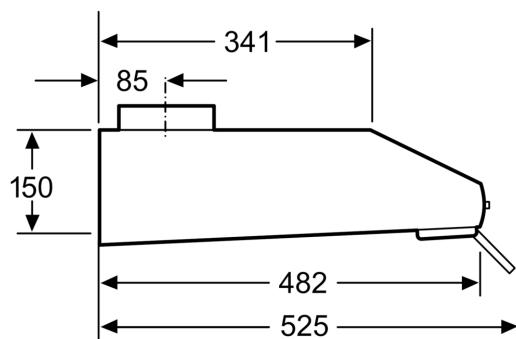

measurements in mm